

Key Performance Indicators for the Deployment of TAF/TAP Functions for 2023

RU/IM Telematics Joint Sector Group (JSG)



Date: 22 February 2024
Owner: Implementation Reporting Group (IRG)
Doc Reference: RU/IM IRG KPI Report 2023

1 DOCUMENT HISTORY

| Version | Name | Changes | Date |
|---------|---|---------------------------|------------|
| 0.1 | Jan-Christian Arms | Initial version | 01.02.2024 |
| 0.2 | Jan-Christian Arms | Document update | 06.02.2024 |
| 0.3 | Jan-Christian Arms | Document presented at IRG | 07.02.2024 |
| 0.4 | Jan-Christian Arms Rudolf Achermann Filippo Massari | Review | 22.02.2024 |
| 1.0 | | Approved by JSG | 29.02.2024 |

2 TABLE OF CONTENTS

1 DOCUMENT HISTORY 2

2 TABLE OF CONTENTS 3

LIST OF TABLES..... 5

LIST OF DIAGRAMS..... 5

3 EXECUTIVE SUMMARY 6

4 BACKGROUND TO THE ASSIGNMENT 7

5 COMMON REFERENCE FILES – LOCATION CODES..... 8

5.1 Introduction 8

5.2 Primary location data maintenance 10

5.3 Primary location data completeness 11

5.4 Number of SLCs provided in CRD 13

6 COMMON INTERFACE (CI)..... 15

7 TRAIN RUNNING INFORMATION (TRI)..... 16

7.1 Introduction 16

7.2 Degree of usage of Train Running Information (TRI) messages..... 17

8 TRAIN RUNNING INTERRUPTION MESSAGE (TRIM) 20

8.1 Introduction 20

8.2 Number of TRIM per country 21

9 CONSIGNMENT ORDER MESSAGE (COM) 22

9.1 Introduction 22

9.2 Degree of TAF compliant Consignment Order Messages (COM)..... 23

10 WAGON MOVEMENT (WM) 24

10.1 Introduction..... 24

10.2 Degree of TAF compliant Wagon Departure messages 25

| | | |
|-------------|---|-----------|
| 10.3 | Degree of TAF compliant Wagon Arrival messages | 26 |
| 10.4 | Degree of TAF compliant Wagon Reached Destination messages..... | 27 |
| 11 | ROLLING STOCK REFERENCE DATABASE (RSRD)..... | 28 |
| 11.1 | Introduction..... | 28 |
| 11.2 | Use of RSRD function in GCU broker by RUs..... | 29 |
| 11.3 | Implementation of RSRD function in GCU broker by Keepers | 30 |
| 12 | CONCLUSIONS AND RECOMMENDATIONS | 31 |
| | ANNEX: TTT COMPLIANT COMMON SECTOR TOOLS PROVIDING DATA FOR KPIS | 32 |

LIST OF TABLES

| | |
|---|----|
| Table 1: Primary location data maintenance changing ratio | 10 |
| Table 2: Primary location data completeness | 11 |
| Table 3: Number of Subsidiary Location Codes per type | 13 |
| Table 4: Degree of usage of TRI messages for international freight trains | 17 |
| Table 5: Degree of usage of TRI messages for international passenger trains | 17 |
| Table 6: Degree of usage of TRI messages for international freight trains per country | 18 |
| Table 7: Degree of usage of TRI messages for international passenger trains per country | 19 |
| Table 8: Number of TRIM for freight and passenger trains | 21 |
| Table 9: Degree of usage of RSRD by RUs | 29 |
| Table 10: Degree of wagons linked to RSRD | 30 |

LIST OF DIAGRAMS

| | |
|---|----|
| Diagram 1: Maintenance of PLCs per country | 10 |
| Diagram 2: Completeness of PLCs regarding GPS location data | 12 |
| Diagram 3: Completeness of PLCs regarding commercial activity | 12 |
| Diagram 4: Number of SLCs per type code | 14 |
| Diagram 5: Evolution of number of CI certificates | 15 |
| Diagram 6: Degree of usage of TRI freight messages per country | 18 |
| Diagram 7: Degree of usage of TRI passenger messages per country | 19 |
| Diagram 8: Ratio of TAF compliant COM per month | 23 |
| Diagram 9: Ratio of TAF compliant WM departure messages per month | 25 |
| Diagram 10: Ratio of TAF compliant WM Arrival messages per month | 26 |
| Diagram 11: Ratio of TAF compliant WM ReachedDestination messages per month | 27 |

3 EXECUTIVE SUMMARY

Based on previous discussions and decisions taken by the TAF TSI Implementation Reporting Group (IRG) in close cooperation with the European Union Agency for Railways (ERA), the TAF TSI Joint Sector Group (JSG) and the Common Sector Group (CSG) adopted this **second report on Key Performance Indicators (KPI)** related to TSI TAF and TAP operational functions.

Depending on the outcome of the current TSI TAF and TAP revision and the merging into a new Telematic TSI, the ERA aims to replace the traditional “Degree of Implementation (DI)” reporting based on company feedbacks with a new monitoring. The “KPI” reporting based on data coming from TAF TAP TSI (TTT) compliant sector tools might support this new monitoring process. The KPI data might give a better overview of the real implementation and concentrate on the usage and the quality of the implemented functions.

The IRG was mandated to draft first ideas of specific KPI’s together with stakeholders and IT-providers. This second KPI Report contains a set of 7 different TTT functions with its related KPIs:

- Primary and Subsidiary Location Codes (PLC/SLC)
- Common Interface Implementation (CI)
- Train Running Information (TRI)
- Train Running Interruption Message (TRIM) - NEW
- Consignment Order Message (COM) - NEW
- Wagon Movement (WM) -NEW
- Rolling Stock Reference Database (RSRD)

The data in this report is provided by:

- RailNetEurope (RNE) for PLC/SLC, CI, TRI, TRIM
- Raildata for COM, WM - NEW
- International Union of Wagon Keepers (UIP) for RSRD

This second KPI Reporting was carried out in parallel with the original DI reporting.

The data collection in January 2024 proved to be very ambitious as the companies are very busy at this time of the year. All the relevant KPI data was only available by end-January.

Like in all previous reports, the data published in this report by the IRG are shown as delivered by the IT provider tools. No correction is done for missing or illogical data. Any analyse or interpretation or comparison shall be done in a later stage by other entities.

4 BACKGROUND TO THE ASSIGNMENT

According to Commission Regulation (EU) No 1305/2014¹ relating to the Telematics Applications for Freight subsystem (TAF TSI) and to Commission Regulation (EU) No 454/2011² relating to the Telematics Applications for Passenger subsystem (TAP TSI), the European Union Agency for Railways (ERA) shall assess and oversee its implementations.

The Agency has established the ‘TAF TSI Implementation Cooperation Group’ and the ‘TAP TSI Implementation Cooperation Group’ to evaluate the reports of the sector. The remit of this group is monitoring the parameters for RU/IM communication of both TAF and TAP TSIs. Members of the European railway sector are encouraged to submit their reports through the JSG to the Agency.

Since 2013 the implementation of the TAF and TAP TSI (TTT) functions in the Rail sector were reported against the TAF and TAP TSI Masterplans as published on the ERA website. The target implementation dates for all TTT functions expired by end of 2021 - making the current TTT Implementation Reporting (DI reporting) outdated.

ERA therefore suggested establishing a TTT Deployment Reporting. Key Performance Indicators (KPIs) should give a better overview of the real deployment and concentrate on the usage and quality of the TTT functions.

The IRG developed first ideas of specific KPI’s, taking into consideration the main objectives of the rail sector:

- include KPIs to indicate the quality of the data
- show the actual use of TAF TAP functions
- use automatic data coming directly from IT-Tools
- create a benefit for companies
- not create double work and check existing KPIs
- keep TAP Retail and TAF/TAP RU-IM reports separate

The data is provided by IT-Suppliers operating TTT compliant service tools for the Rail sector. The IRG drafts an annual report with this information and hands it over to ERA.

The aim is to gradually replace the Implementation Reporting (DI) by the Deployment Reporting (KPI). Because of major differences between TAP Retail and TAF/TAP RU-IM Communication in terms of reporting, the present report focuses on TTT RU-IM functions only. It is not intended to replace or conflict with any other quality report from the Rail sector, such as PRIME KPI.

The separate TTT KPI Reporting Handbook is a general guideline for NCP’s, NAE’s, sector organizations, implementers, and data providers.

The organization and administration of the new KPI Reporting are integral part of the JSG governance and processes. It has been adopted by the JSG and ICG. The IRG leads the process and exchanges information regularly with all involved stakeholders. Roles and responsibilities of the IRG are set out in the Telematics Governance Terms of Reference (JSG Governance Document) in force.

¹ Consolidated text: Commission Regulation (EU) No 1305/2014 of 11 December 2014 on the technical specification for interoperability relating to the telematics applications for freight subsystem of the rail system in the European Union and repealing the Regulation (EC) No 62/2006, published 18th April 2021

² Consolidated text: Commission Regulation (EU) No 454/2011 of 5 May 2011 on the technical specification for interoperability relating to the subsystem ‘telematics applications for passenger services’ of the trans-European rail system, published 16th June 2019

5 COMMON REFERENCE FILES - LOCATION CODES

5.1 Introduction

Section 4.2.10.1 of the TAF TSI³ sets out the following mandatory requirements related to Coding of Locations, namely Primary Location Codes (PLC) and Subsidiary Location Codes (SLC).

4.2.10.1. Reference Files

For the operation of freight trains on the European network, the following reference files must be available and accessible to all service providers (IMs, RUs, logistic providers and fleet managers). The data must always represent the actual status. Where a reference file is in common use with the TAP TSI, the development and changes must be in line with TAP TSI, to achieve optimum synergies.

The European Union Agency for Railways will centrally store and maintain unique codes for the following reference data:

- Reference File of the Coding for all IMs, RUs, Service provider companies.
- Reference File of the Coding of Locations (Primary and subsidiary),

The Agency will save a copy of the Reference File for the Primary Locations Codes and Company Codes. On individual request and without prejudice to intellectual property rights, this data shall be available for public consultation.

The RU/IM Telematics Sector Handbook⁴ in section 9.3.3 ‘Location Description’ further defines PLCs and SLCs.

Definition of Primary Location

Primary Location is a place used by IM to define a path for a train in TAF/TAP TSI framework/messages. This location is a rail point inside the rail network where train starts, ends, stops, or runs through or change line. This location must be managed by an Infrastructure Manager (IM) identified by company code.

Primary locations are for example: stations, yards, halts, handover points, border points, open access terminals.

Primary locations are identified by single and unique Primary Location codes. Primary location code is allocated based on processes defined by national entity. Primary location codes are used in any kind of TAF/TAP communication.

Definition of Subsidiary Location

Subsidiary location must be linked to a Primary Location and specifies in more detailed way part, attributes, or usage of Primary location. It may be also a non-rail point or a rail point that is not managed by an Infrastructure Manager (IM). It may be defined by entity having company code according to their needs. The Subsidiary location is optional and dependent upon business needs.

³ Consolidated text: Commission Regulation (EU) No 1305/2014 of 11 December 2014 on the technical specification for interoperability relating to the telematics applications for freight subsystem of the rail system in the European Union and repealing the Regulation (EC) No 62/2006, published 18th April 2021

⁴ Sector Handbook for the Communication between Railway Undertakings and Infrastructure Managers (RU/IM Telematics Sector Handbook), submitted on 21st October 2021

The Central Reference File Database (CRD) is the European Reference Database for locations used for RU/IM communication and therefore serves as the source for input data of the respective KPIs.

IMs deliver the PLCs to CRD, and RUs provide SLCs to CRD. PLCs and SLCs are allocated by NAEs. The correctness of allocation or properties of PLCs/SLCs or is not subject of reporting.

5.2 Primary location data maintenance

Regular maintenance of PLCs in CRD is important and mandated by legislation.

IMs are regarded to maintain their PLCs in CRD when updating them at least once a year. An update means either adding a new PLC or updating/deleting an existing PLC.

| | |
|---|--|
| <p>KPI Definition</p> <p>The number of IMs maintaining PLCs in the CRD in relation to the total number of IMs having PLCs in the CRD indicates the level of maintenance.</p> $\frac{\text{number of IMs maintaining PLCs}}{\text{number of IMs having PLCs}} \times 100 \leq 100 \%$ | |
|---|--|

| 2023 | Q1 | Q2 | Q3 | Q4 |
|-------------------------------------|-----------|-----------|-----------|-----------|
| Number of PLCs changed | 1.271 | 688 | 2.435 | 3.335 |
| Total number of PLCs in CRD | 60.256 | 60.786 | 60.806 | 60.935 |
| Changing ratio [% of PLCs] | 2 | 1 | 4 | 5 |
| Number of IMs maintaining PLCs | 17 | 12 | 13 | 15 |
| Number of IMs having PLCs | 50 | 50 | 50 | 48 |
| Maintenance ratio [% of IMs] | 34 | 24 | 26 | 31 |

Table 1: Primary location data maintenance changing ratio

Compared to the figures of the year 2022, the following conclusions can be drawn:

- The total number of PLCs in CRD has increased on average by one thousand.
- The changing ratio of PLCs has increased from below 1 % to up to 5 %.
- The maintenance ratio of IMs in the previous year has never exceeded 30 %.

For countries with data from more than one IM, PLCs are regarded to be maintained, if the dominating IM did.

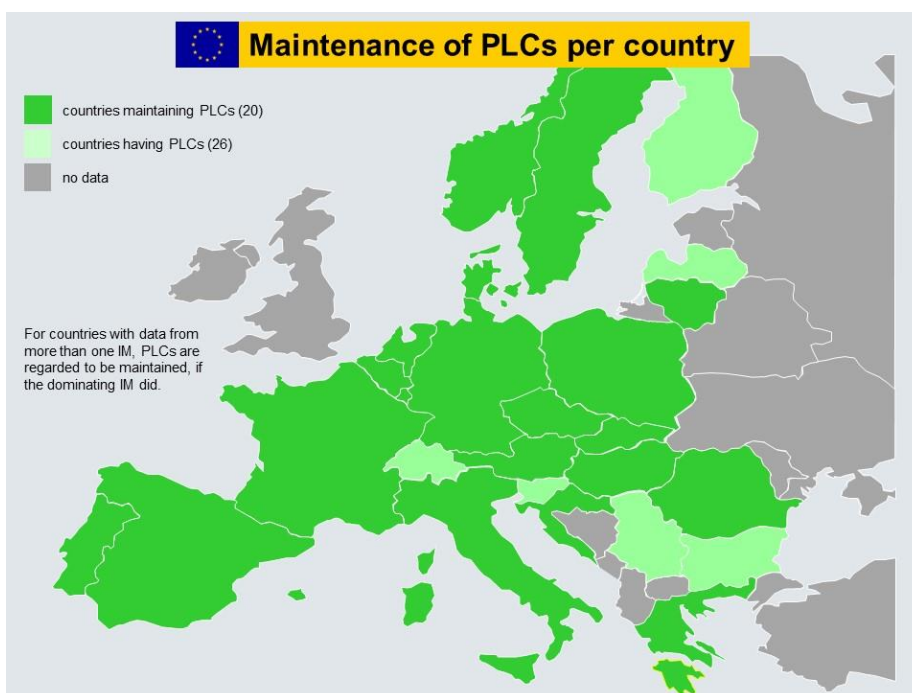


Diagram 1: Maintenance of PLCs per country

5.3 Primary location data completeness

PLCs are classified by important, voluntary properties (flags), such as GPS location data (geo coordinates) or possible commercial activity (freight and/or passenger station).

| |
|--|
| <p>KPI Definition</p> <p>This KPI is defined as the degree of recording of voluntary properties of PLCs.</p> $\frac{\text{number of PLCs having particular property}}{\text{total number of PLCs in CRD}} \times 100 \leq 100 \%$ |
|--|

Definition of properties to be reported:

- GPS location data (longitude and latitude)
 - Longitude of point representing Position of Location. It is strongly recommended to populate this element. It is possible to use up to 6 decimals.
 - Latitude of point representing Position of Location. It is strongly recommended to populate this element. It is possible to use up to 6 decimals.
- Freight possible (Freight start date, Freight end date) and/or Passenger possible (Passenger start date, Passenger end date)
 - Information, that Freight and/or Passenger train can make freight and/or passenger commercial activity at primary location.
 - Start date of use Location for Freight and/or Passenger train. StartDate is mandatory if Freight and/or Passenger possible is selected.
 - End date of use Location for Freight and/or Passenger train.

| 2023 | Q1 | Q2 | Q3 | Q4 |
|--|-------------|-------------|-------------|-------------|
| PLCs with GPS location data | 51.669 | 51.521 | 51.501 | 51.620 |
| PLCs with commercial activity | 35.495 | 35.554 | 35.498 | 35.559 |
| Total number of PLCs in CRD | 60.256 | 60.789 | 60.806 | 60.935 |
| GPS location data ratio [% of PLCs] | 86 % | 85 % | 85 % | 85 % |
| Commercial activity ratio [% of PLCs] | 59 % | 58 % | 58 % | 58 % |

Table 2: Primary location data completeness

For countries with data from more than one IM, completeness however calculates always like the dominating IM.

The completeness of PLCs regarding voluntary properties as displayed in the following European maps reflects the latest data of Q4 2022.

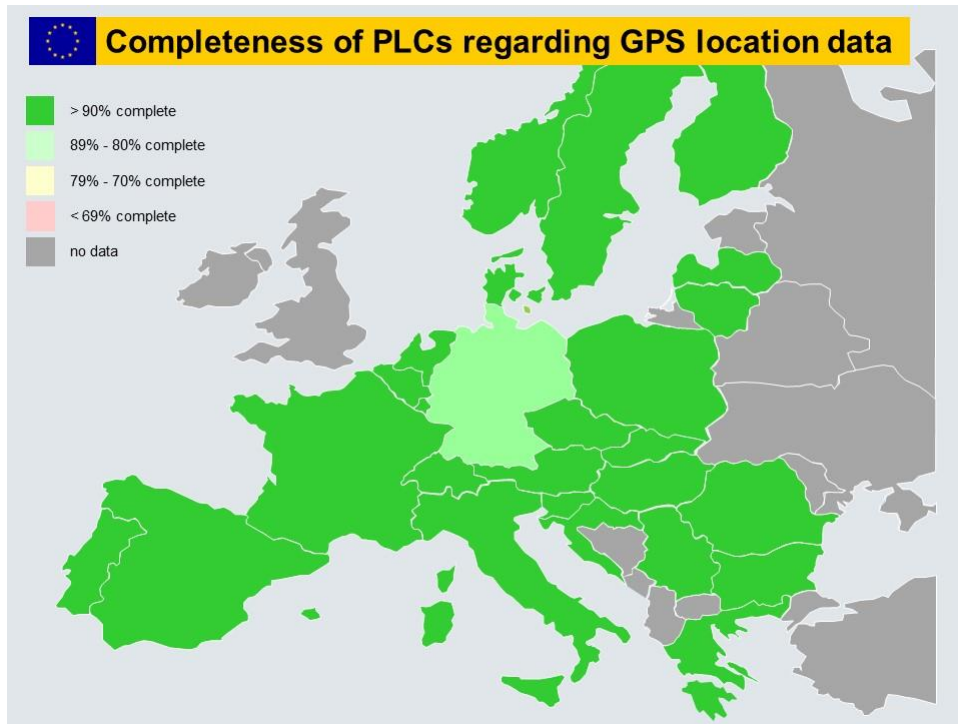


Diagram 2: Completeness of PLCs regarding GPS location data

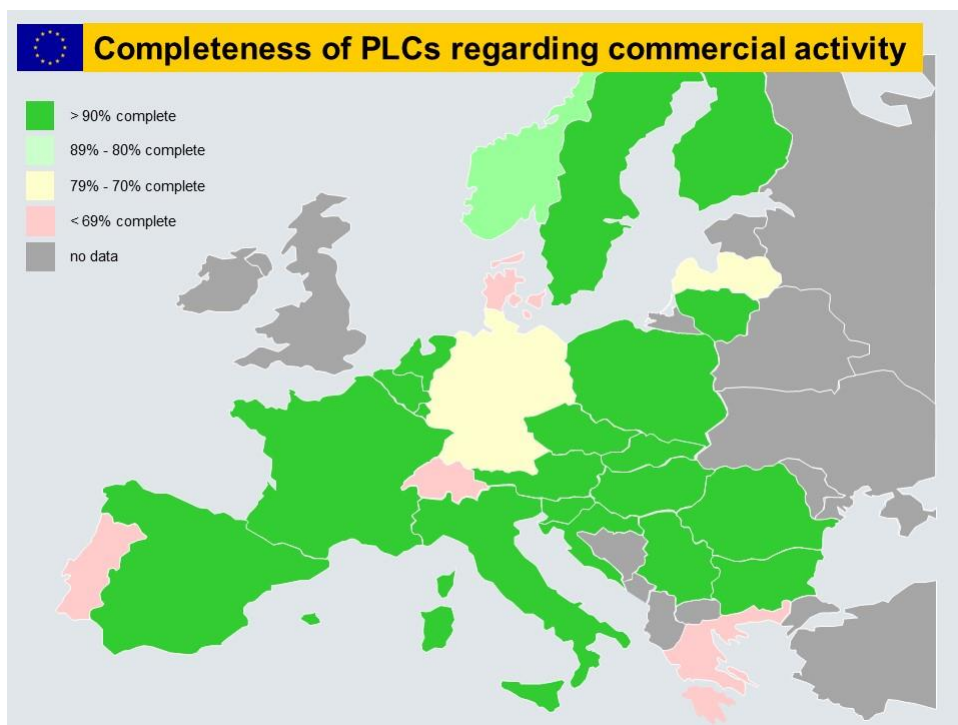


Diagram 3: Completeness of PLCs regarding commercial activity

5.4 Number of SLCs provided in CRD

KPI Definition

This KPI provides the number of specific types of SLCs stored in CRD showing their development over time. SLCs are defined by type codes.

Absolute number per SLC Type Code

The total number of SLCs stored in CRD at the end of 2022 was 56.626 for 21 different types. At the end of 2023 this total number was with 55.114 slightly lower.

The following SLC Type Codes as defined in the TAF/TAP-xsd are selected for this KPI:

- Location Subsidiary Type Code 1 - Track
- Location Subsidiary Type Code 3 - Border point
- Location Subsidiary Type Code 15 - Platform
- Location Subsidiary Type Code 36 - Freight Yard
- Location Subsidiary Type Code 37 - Loading point
- Location Subsidiary Type Code 42 - DIUM stations
- Location Subsidiary Type Code 57 - Intermodal Terminal
- Location Subsidiary Type Code 66 - Location ENEE Code

| SLC Type Code | Description | # SLC Q1/2023 | # SLC Q2/2023 | # SLC Q3/2023 | # SLC Q4/2023 |
|---------------|---------------------|---------------|---------------|---------------|---------------|
| 1 | Track | 19.042 | 19.037 | 19.042 | 19.091 |
| 3 | Border point | 238 | 240 | 240 | 246 |
| 15 | Platform | 600 | 600 | 600 | 600 |
| 36 | Freight yard | 1.432 | 1.432 | 1.433 | 1.433 |
| 37 | Loading point | 11.536 | 11.946 | 11.951 | 10.380 |
| 42 | DIUM station | 5.772 | 5.359 | 5.360 | 5.943 |
| 57 | Intermodal terminal | 86 | 86 | 565 | 565 |
| 66 | Location ENEE code | 2.687 | 2.687 | 2.687 | 2.683 |
| Total | | 41.393 | 41.387 | 41.878 | 40.941 |

Table 3: Number of Subsidiary Location Codes per type

In general, there are only little changes between the 3-month periods. However, certain variations can be observed for the freight relevant type codes 37, 42 and 57 throughout the year 2023.

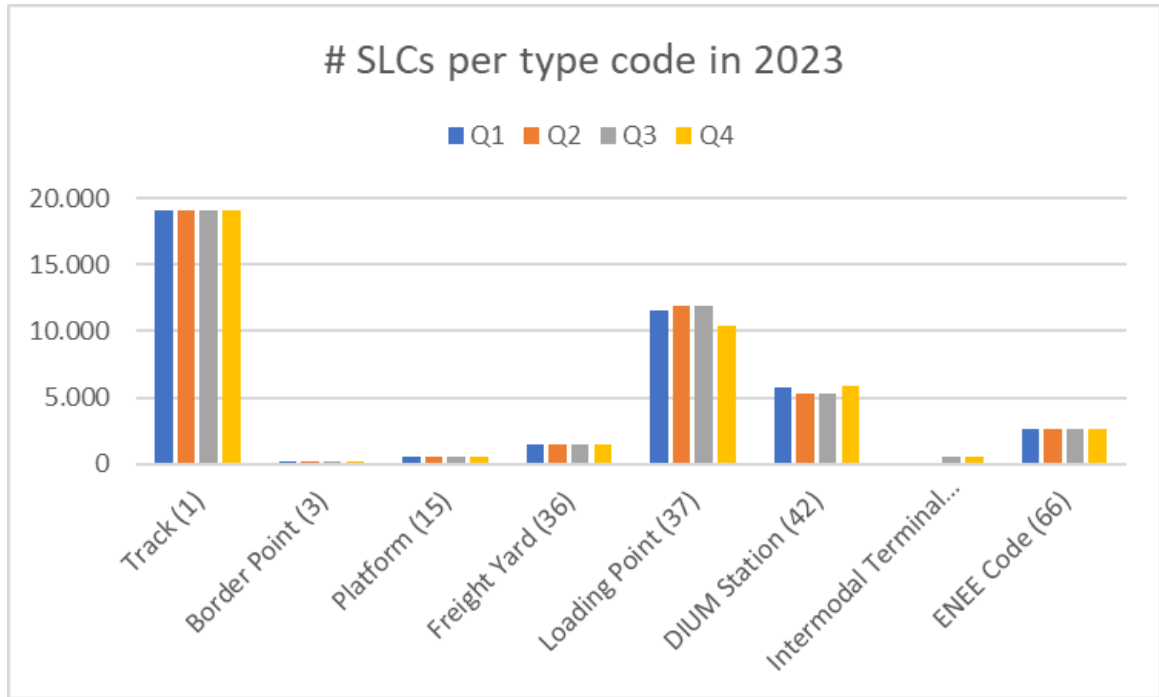


Diagram 4: Number of SLCs per type code

6 COMMON INTERFACE (CI)

KPI Definition

This KPI displays the development in terms of number of certificates provided by RNE, operating as the Single Certification Authority. RNE is the only certificate provider for TAF/TAP compliant actors.

Absolute number of certificates

Q1 2022 - 266 certificates
 Q2 2022 - 185 certificates
 Q3 2022 - 266 certificates
 Q4 2022 - 247 certificates
 Q1 2023 - 272 certificates
 Q2 2023 - 353 certificates
 Q3 2023 - 357 certificates
 Q4 2023 - 417 certificates

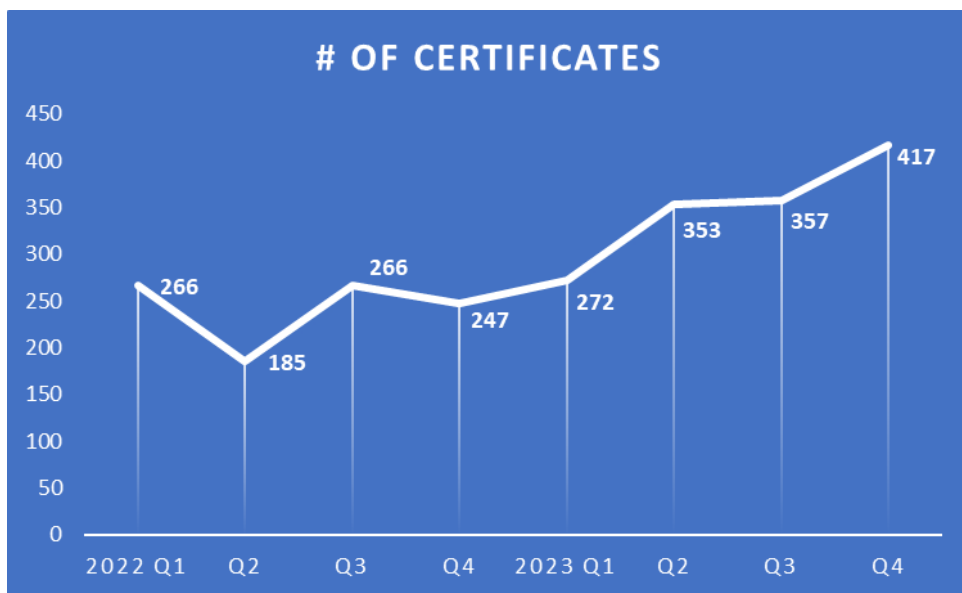


Diagram 5: Evolution of number of CI certificates

The number of certificates varies because certificates automatically expire at a specific date and will have to be provided again.

A clear upward trend is visible in 2023. The highest absolute number of certificates in 2023 is nearly 60 % above the respective number in 2022.

7 TRAIN RUNNING INFORMATION (TRI)

7.1 Introduction

Section 4.2.4.3 of the TAF TSI sets out the following mandatory requirements related to Train Running Information (TRI).

4.2.4.3. Train Running Information message and Train Delay Cause message

The 'Train Running Information message' must be issued by the IM to the Responsible RU upon:

- Departure from departure point, arrival at destination,
- Arrival and departure at handover points, interchange points and at agreed reporting points based on contract (e.g., handling points).

The RU/IM Telematics Sector Handbook in section 15.1 'Process triggering the Train Running Information message' further defines the TRI.

The IM has to provide train reporting at appropriate reporting points indicating actual time and the delta-time value (as described in OPE TSI § 4.2.3.4.2.1). This message is sent to the ResponsibleRU to inform RU controllers.

...

The time limit to send the message after the train has reached the reporting point is defined by national rules or contractual agreement. In practice, the sending is done in "real time" in case of electronic tracking and tracing systems.

The data collection focusses on international trains to demonstrate interoperability. According to an agreement between RNE and IMs, TRI messages for all international trains are being communicated with standardized messages in different versions to TIS. Additional bilateral exchanges between IMs sometimes exist. International trains are flagged as international touching a border station (more than one IM is involved).

7.2 Degree of usage of Train Running Information (TRI) messages

KPI Definition

This KPI indicates the degree of TRI messages provided by IMs. For this purpose, the number of TRI messages sent from TIS (TRI from TIS) is related to the number of locations, where a TIS message is expected to be sent. (Path Details).

$$\frac{\text{number of TRI messages}}{\text{number of expected TRI messages}} \times 100 \leq 100 \%$$

This KPI demonstrates message exchange between IMs and the TIS system of RNE. Bilateral communication between IMs is not reflected by these figures.

For the input data to the calculation the following conditions apply:

Number of TRI messages (running advice from TIS)

- Predefined locations for which IMs cannot provide TRI messages will be excluded from the reporting.

Number of expected TRI messages (path details are provided by IMs on daily basis to TIS)

- For Path Details where no single TRI running advice is available, the train will not be considered.
- Results where path details are not available (e.g., in case of re-routing) are not considered.

The KPI calculation only considers TAF compliant messages, which 13 countries are providing in 2023. Compared to the previous year 3 more countries exchange TAF compliant messages with TIS as stated in tables 6 and 7. The total number of TAF/TAP compliant messages exchanged for international freight trains has grown by more than 20 % and for international passenger trains even by more than 40 % from the year 2022 to 2023.

According to the path details provided per country, TIS expected nearly 43 million TRI messages for international freight and passenger trains in 2023. More than 38 million TRI messages (running advice) have been sent. The overall average degree of TRI messages for international trains calculates to 88 %. Quarterly values are given in the tables below.

| International Freight Trains 2023 | Q1 | Q2 | Q3 | Q4 | Total (2023) | Total (2022) |
|-----------------------------------|-----------|-----------|-----------|-----------|--------------|--------------|
| Timetable information (PD) | 4.249.736 | 4.568.112 | 4.760.422 | 4.989.045 | 18.567.315 | 15.403.492 |
| Running information (TRI) | 3.899.129 | 4.044.907 | 4.003.893 | 3.925.806 | 15.873.735 | 12.666.557 |
| Degree of usage TRI [%] | 92 | 89 | 84 | 79 | 85 | 82 |

Table 4: Degree of usage of TRI messages for international freight trains

| International Passenger Trains 2023 | Q1 | Q2 | Q3 | Q4 | Total (2023) | Total (2022) |
|-------------------------------------|-----------|-----------|-----------|-----------|--------------|--------------|
| Timetable information (PD) | 5.745.391 | 5.834.216 | 6.495.969 | 6.508.647 | 24.584.223 | 16.782.145 |
| Running information (TRI) | 5.373.410 | 5.235.866 | 5.653.006 | 5.549.004 | 21.811.286 | 15.247.667 |
| Degree of usage TRI [%] | 94 | 90 | 87 | 85 | 89 | 91 |

Table 5: Degree of usage of TRI messages for international passenger trains

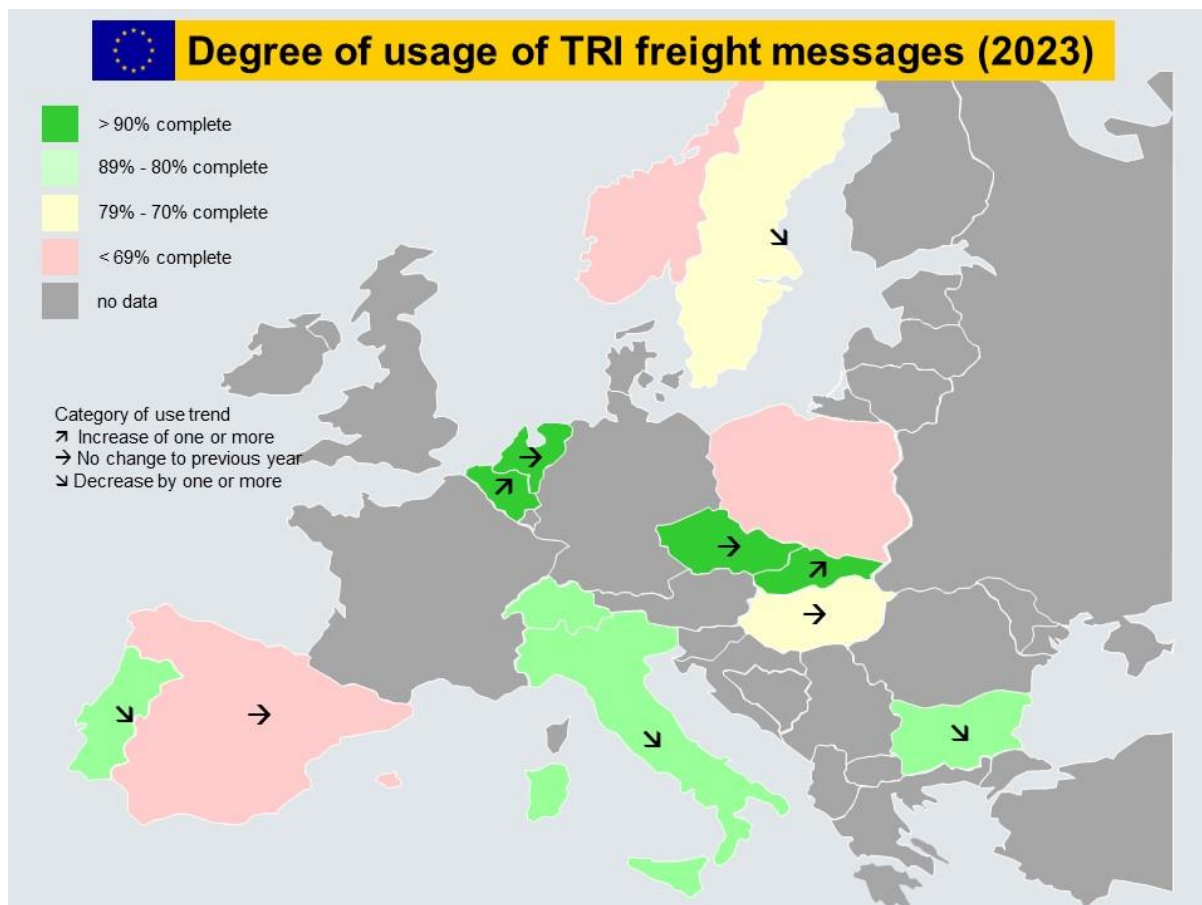


Diagram 6: Degree of usage of TRI freight messages per country

| Country | Number of PD messages (Freight trains) | Number of TRI messages (Freight trains) | Degree of usage [%] | [%] 2022 |
|---------|--|---|---------------------|----------|
| BE | 2.822.744 | 2.746.957 | 97 | 78 |
| BG | 36.369 | 29.633 | 81 | 94 |
| CH | 3.348.671 | 2.813.229 | 84 | |
| CZ | 2.648.647 | 2.630.633 | 99 | 96 |
| ES | 293.464 | 141.935 | 48 | 60 |
| HU | 2.120.117 | 1.577.149 | 74 | 75 |
| IT | 2.043.299 | 1.722.268 | 84 | 92 |
| NL | 1.782.274 | 1.732.377 | 97 | 90 |
| NO | 234.393 | 127.118 | 54 | |
| PL | 1.006.019 | 523.289 | 52 | |
| PT | 182.741 | 156.221 | 85 | 90 |
| SE | 1.014.610 | 718.936 | 71 | 86 |
| SK | 1.033.967 | 953.990 | 92 | 62 |
| Total | 18.567.315 | 15.873.735 | 85 | 82 |

Table 6: Degree of usage of TRI messages for international freight trains per country

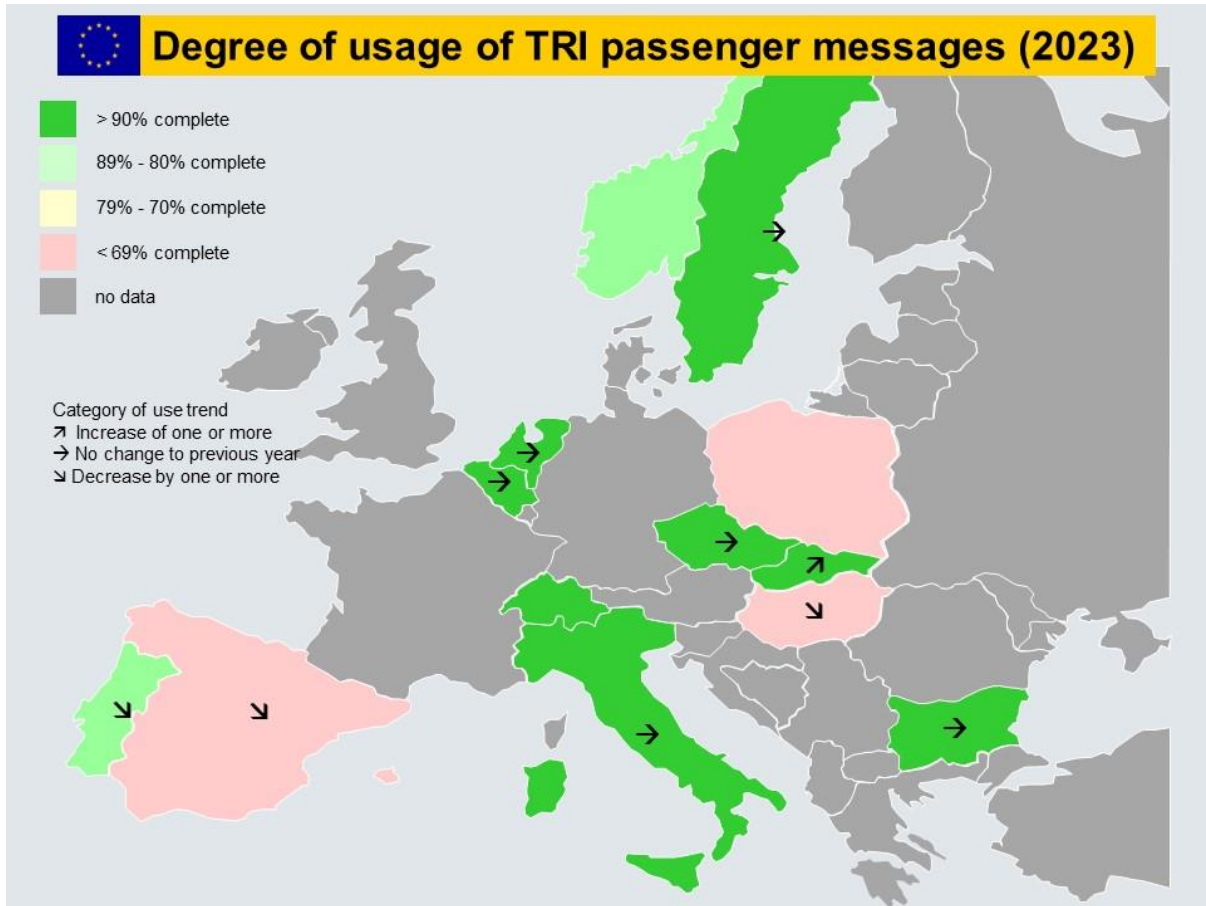


Diagram 7: Degree of usage of TRI passenger messages per country

| Country | Number of PD messages (Passenger trains) | Number of TRI messages (Passenger trains) | Degree of usage [%] | [%] 2022 |
|---------|---|--|------------------------|----------|
| BE | 4.035.072 | 3.994.992 | 99 | 99 |
| BG | 5.711 | 5.349 | 94 | 98 |
| CH | 5.705.919 | 5.459.794 | 96 | |
| CZ | 4.060.893 | 4.026.225 | 99 | 99 |
| ES | 256.095 | 156.315 | 61 | 85 |
| HU | 2.698.518 | 1.826.475 | 68 | 72 |
| IT | 1.442.056 | 1.370.306 | 95 | 97 |
| NL | 1.841.820 | 1.809.166 | 98 | 98 |
| NO | 88.109 | 70.163 | 80 | |
| PL | 2.321.514 | 1.128.080 | 49 | |
| PT | 77.963 | 69.213 | 89 | 98 |
| SE | 1.146.951 | 1.076.812 | 94 | 96 |
| SK | 903.602 | 818.396 | 91 | 57 |
| Total | 24.584.223 | 21.811.286 | 89 | 91 |

Table 7: Degree of usage of TRI messages for international passenger trains per country

8 TRAIN RUNNING INTERRUPTION MESSAGE (TRIM)

8.1 Introduction

Section 4.2.5.2 of the TAF TSI sets out the following mandatory requirements related to Train Running Interruption Message (TRIM).

4.2.5.2. Train Running Interruption message

If the train is interrupted, the IM issues this message to the next neighbouring IM involved in the train run and to the Responsible RU.

In the case of combined transport under contractual agreement, the LRU/RU shall ensure the 'Train Running Interruption' message is provided to the Terminal Operator.

The RU/IM Telematics Sector Handbook in section 15.1 'Process triggering the Train Running Information message' further defines the TRI.

If the train has been stopped due to a disruption (e.g. line blocked, loco breakdown) and no forecast of its further run is yet available, the Train Running Interrupted messages must be sent from IM to ResponsibleRU. The message is the trigger to inform the ResponsibleRU (and the next IM if relevant). In the case of combined transport under contractual agreement, the LeadRU/ResponsibleRU shall ensure the Train Running Interruption message is provided to the Terminal Operator.

A train could not yet have reached the disruption but is likely to be affected (i.e. forecasts for locations after the disruption point are not possible). In this case, a warning can optionally be issued from the IM to the ResponsibleRU using the Train Running Interruption message with an indication in the TrainNotAtInterruptionPoint element.

...

When the disruption is on the RU-side (e.g. loco breakdown) it has to inform the IM according to § 4.2.3.3.2 of OPE TSI. The ResponsibleRU could use the Train Running Interruption message if this agreed.

After the problem is analysed, ResponsibleRU and IM decide on a way of action (e.g. rerouting, cancellation, delaying the train).

The data collection focusses on international trains to demonstrate interoperability. According to an agreement between RNE and IMs, TRIM messages for all international trains are being communicated with standardized messages in different versions to TIS. Additional bilateral exchanges between IMs sometimes exist. International trains are flagged as international touching a border station (more than one IM is involved).

8.2 Number of TRIM per country

KPI Definition

This KPI displays the development in terms of number of TRIM per country as provided by the TIS of RNE.

Absolute number of TRIM per country

The KPI calculation considers TAF compliant messages only, which 7 countries were providing in 2023.

According to the TRIM provided per country, TIS processed about 75 thousand messages for international freight and passenger trains in 2023. Passenger trains only account for around 10 percent of those messages.

| Country | Number of TRIM messages (Freight trains) | Number of TRIM messages (Passenger trains) |
|--------------|---|---|
| AT | 3.270 | 1.002 |
| BE | 33.502 | 3.546 |
| CZ | 12.420 | 943 |
| ES | 2.028 | 511 |
| HU | 4.931 | 1.818 |
| NL | 12.264 | 506 |
| PT | 44 | 10 |
| Total | 68.459 | 8.336 |

Table 8: Number of TRIM for freight and passenger trains

9 CONSIGNMENT ORDER MESSAGE (COM)

9.1 Introduction

Section 4.2.1.2 of the TAF TSI sets out the following mandatory requirements related to Consignment Order Messages (COM).

4.2.1.2. Consignment orders

The consignment order is primarily a subset of the Consignment Note information. It must be forwarded to the RUs involved in the transport chain by the LRUs. The content of the Consignment order must show the relevant information which is needed for an RU to effect transportation during its responsibility until handover to next RU.

The RU/RU Telematics Sector Handbook⁵ for the communication between Railway Undertakings in section 2.3.1 ‘Consignment Order Message - regulatory requirements’ further defines the COM.

The LRU determines the other RUs involved in the respective transportation to provide them in advance with Consignment Order Messages (“COM”).

...

Depending on the RUs involved, several modes of data exchange can be used for one transport.

Where applicable the LRU creates an internal order for its own production system.

A trip plan must be created when at least one other RU is involved. This action is not part of the COM chapter.

The RUs that have received a COM in advance from the LRU check their availability of resources and paths. In case of non-feasibility, the RU concerned informs the LRU in an appropriate way.

The data collection focusses on COM messages processed by the application “OpenRailFreightEdiUserSystem (ORFEUS)” managed by Raildata and already used by the sector as standard.

⁵ TAF TSI Sector Handbook for the communication between Railway Undertakings (RU/RU Telematics Sector Handbook), submitted on 25 October 2023

9.2 Degree of TAF compliant Consignment Order Messages (COM)

KPI Definition

This KPI displays the development in terms of number of COM per month as provided by the ORFEUS of Raildata.

Absolute number of COM per month

The number of TAF compliant messages in relation to the total number of COM indicates the respective ratio.

Ratio of TAF compliant COM per month

Input data is collected at a monthly basis. Messages need to be TAF compliant including TAF locations (at least version 1.5). Older message types (smaller than 1.5) are not TAF compliant.

The total number of COM processed by ORFEUS in 2023 sums up to 809.065 messages. Overall, 58 % of these messages were TAF compliant in the year 2023.

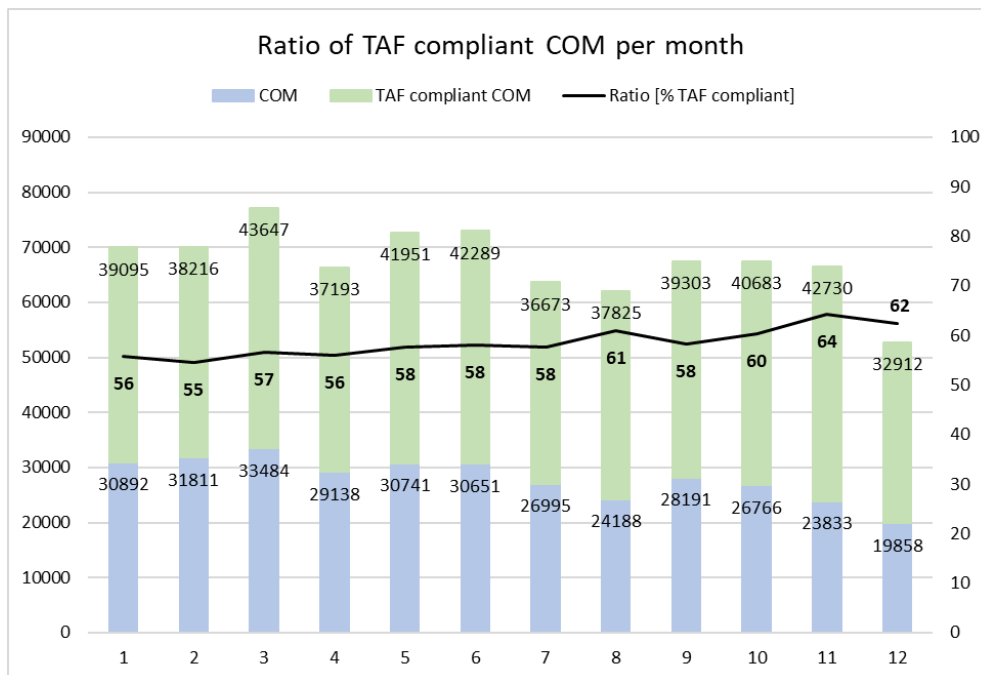


Diagram 8: Ratio of TAF compliant COM per month

10 WAGON MOVEMENT (WM)

10.1 Introduction

Section 4.2.7 of the TAF TSI sets out the following mandatory requirements related to Wagon Movement (WM).

4.2.7. Wagon Movement

For the reporting of the movement of a wagon, data included in these messages must be stored and electronically accessible. They must be also exchanged within message on contractual base to authorised parties.

Under contractual agreement, the LRU must provide to the Customer the wagon movement information using the messages described below.

The RU/RU Telematics Sector Handbook⁶ for the communication between Railway Undertakings in section 2.3.1 ‘Consignment Order Message - regulatory requirements’ further defines the COM.

In order to fulfil the needs of its customers and relevant wagon keepers, each RU needs to have continuously information about actual position and status of wagons which they took over for transport or other purpose.

In case when wagons are transported in collaboration between more RUs, they need to mutually exchange information about actual position and status of the wagons.

This exchange has to be performed with the Wagon Status messages.

...

RUs can exchange the Wagon Status messages either in bilateral way or through a central message broker.

The data collection focusses on WM messages processed by the application “OpenRailFreightEdiUserSystem (ISR)” managed by Raildata and already used by the sector as standard.

For the present KPI report the following Wagon Status messages have been selected:

- Wagon departure
- Wagon arrival
- Wagon delivered

⁶ TAF TSI Sector Handbook for the communication between Railway Undertakings (RU/RU Telematics Sector Handbook), submitted on 25 October 2023

10.2 Degree of TAF compliant Wagon Departure messages

One RU informs with this message other involved RU(s) that the wagon has departed from station with a train.

KPI Definition

This KPI displays the development in terms of number of Wagon Departure messages per month as provided by the ISR of Raildata.

Absolute number of WM departure per month

The number of TAF compliant messages in relation to the total number of Wagon Departure messages indicates the respective ratio.

Ratio of TAF compliant WM departure per month

Input data is collected at a monthly basis. Messages need to be TAF compliant including TAF locations (at least WSM 60). Older message types (older than WSM 60) are not TAF compliant.

The total number of Wagon Departure messages processed by ISR in 2023 sums up to 31.319.379 messages. Overall, approximately 2 % of these messages were TAF compliant in the year 2023.

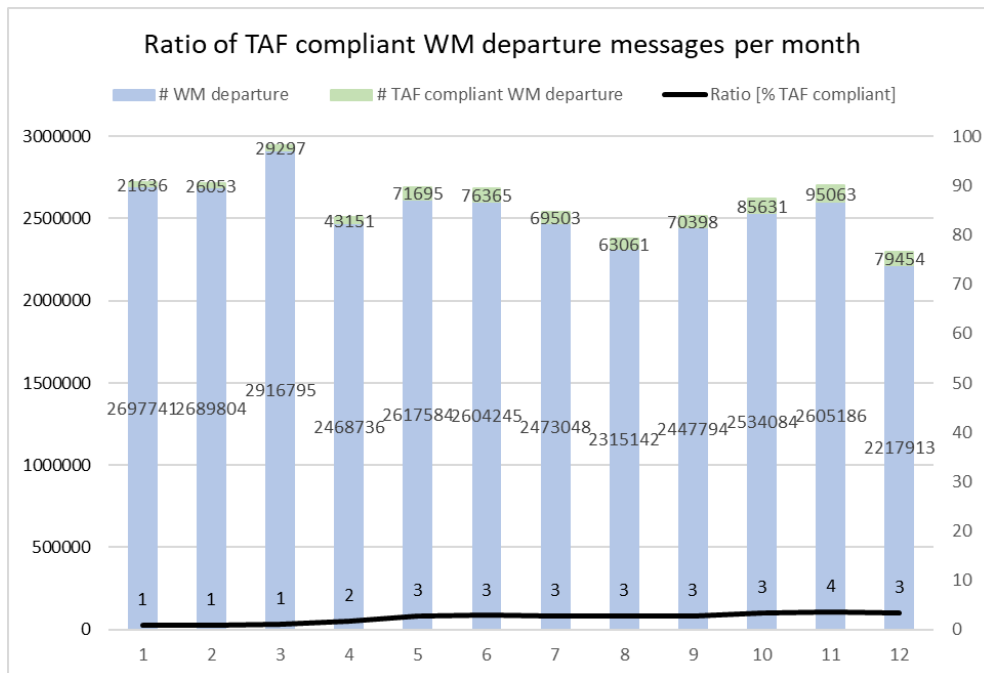


Diagram 9: Ratio of TAF compliant WM departure messages per month

10.3 Degree of TAF compliant Wagon Arrival messages

One RU informs with this message other involved RU(s) that the wagon has arrived to station with a train.

KPI Definition

This KPI displays the development in terms of number of Wagon Arrival messages per month as provided by the ISR of Raildata.

Absolute number of WM arrival per month

The number of TAF compliant messages in relation to the total number of Wagon Arrival messages indicates the respective ratio.

Ratio of TAF compliant WM arrival per month

Input data is collected at a monthly basis. Messages need to be TAF compliant including TAF locations (at least WSM 60). Older message types (older than WSM 60) are not TAF compliant.

The total number of Wagon Arrival messages processed by ISR in 2023 sums up to 31.525.695 messages. Overall, approximately 3 % of these messages were TAF compliant in the year 2023.

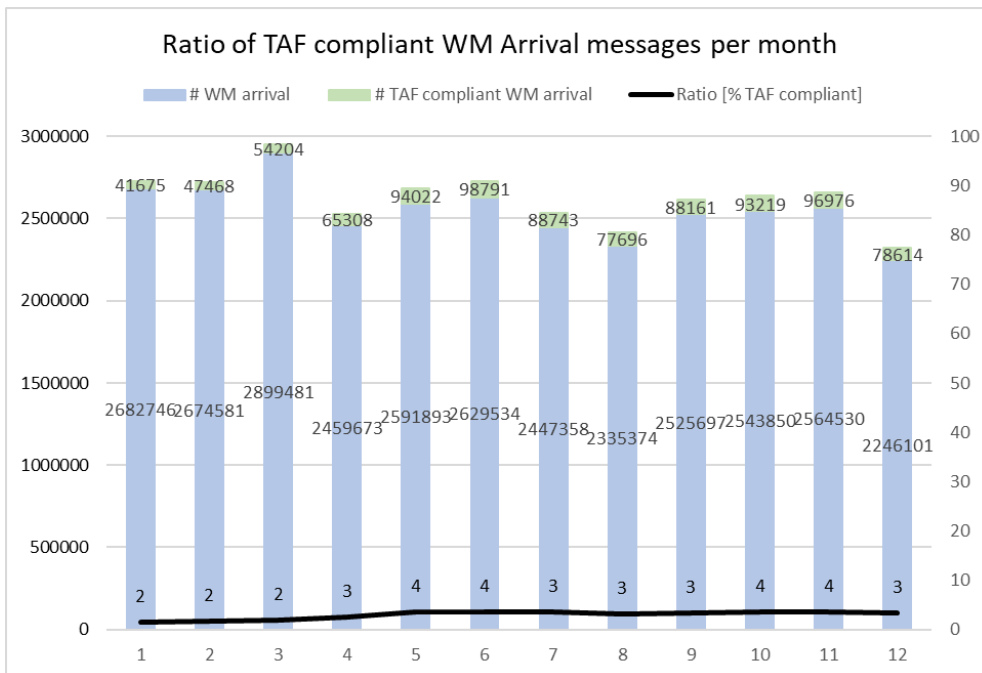


Diagram 10: Ratio of TAF compliant WM Arrival messages per month

10.4 Degree of TAF compliant Wagon Reached Destination messages

The last RU informs other involved RU(s) that the wagon arrived to destination station with a train.

KPI Definition

This KPI displays the development in terms of number of Wagon Reached Destination messages per month as provided by the ISR of Raildata.

Absolute number of WM ReachedDestination per month

The number of TAF compliant messages in relation to the total number of Wagon Reached Destination messages indicates the respective ratio.

Ratio of TAF compliant WM ReachedDestination per month

Input data is collected at a monthly basis. Messages need to be TAF compliant including TAF locations (at least WSM 60). Older message types (older than WSM 60) are not TAF compliant.

The total number of Wagon Arrival messages processed by ISR in 2023 sums up to 9.681.683 messages. Overall, approximately 15 % of these messages were TAF compliant in the year 2023.

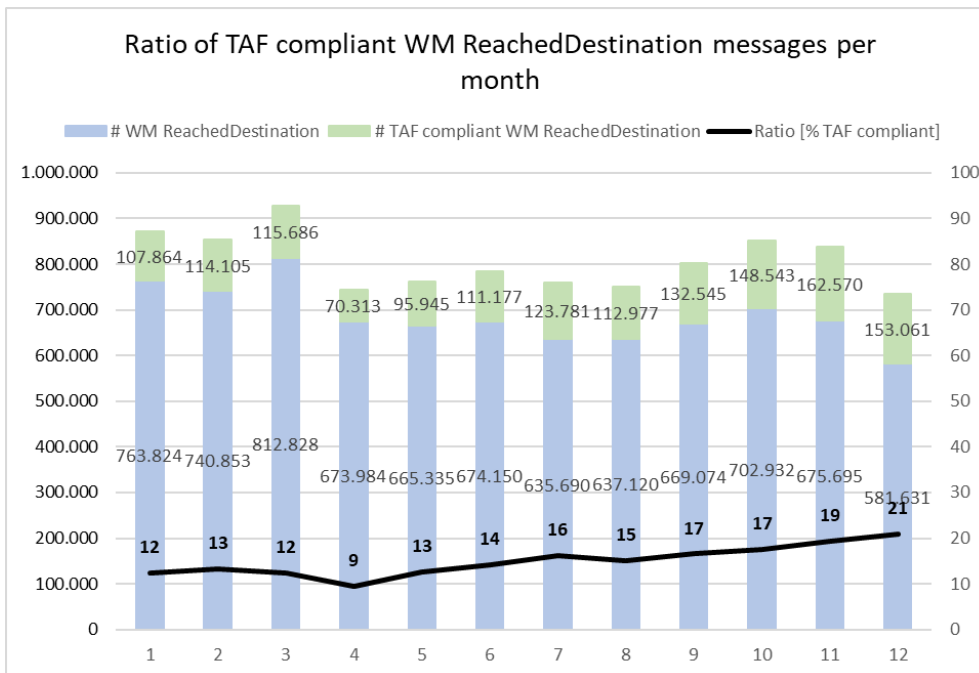


Diagram 11: Ratio of TAF compliant WM ReachedDestination messages per month

11 ROLLING STOCK REFERENCE DATABASE (RSRD)

11.1 Introduction

Section 4.2.9.2 of the TAF TSI sets out the following mandatory requirements related to Rolling Stock Reference Database (RSRD).

4.2.9.2. The Rolling Stock Reference Databases

The keeper of rolling stock is responsible for the storage of rolling stock data within a Rolling Stock Reference Database.

...

The Rolling Stock Reference Databases must allow easy access to the rolling stock reference data to minimize the volume of data transmitted for each operation. Contents of the Databases must be accessible, based on structured access rights depending on privilege to all Service Providers (especially IMs and RUs).

The entries in the Rolling Stock Reference Database can be grouped as follows:

- Administrative data, related to certification and registration items. Additionally, according to Commission Regulation (EU) No 445/2011 (1), article 5, the Wagon Keepers shall store the ECM certification identification number
- Design data, which shall include all constitutive (physical) elements of the rolling stock, especially information required by RUs for train planning and operation.

The keeper is obliged to ensure that these data are available and the processes behind have been conducted.

The RSRD function has been mirrored in appendix 16 of the GCU. All GCU Keepers (including RUs which are Keepers) have the obligation to provide RSRD data via the GCU broker. The GCU trustee provides the input data to the Implementation Reporting Group (IRG). The GCU Joint Committee (UIC, UIP, ERFA) has agreed and supports the creation of this KPI.

11.2 Use of RSRD function in GCU broker by RUs

All messages exchanged with the GCU Broker are TAF compliant. The number of RUs in the GCU broker represent the status at the end of the reporting period.

KPI Definition

This KPI shows the degree of use of RSRD function by counting the number of RUs which are querying TAF RSRD data via the GCU broker compared to all signatories RU which could potentially query RSRD data.

$$\frac{\text{number of RUs querying the GCU broker}}{\text{number of RUs in the GCU broker}} \times 100 \leq 100 \%$$

The number of different RU that query the GCU broker at least once in the respective year. The degree of use of RSRD calculates to 15% by the end of 2023 as shown in the table below.

| Year | 2022 | 2023 |
|---|-----------|-----------|
| Number of RUs querying the GCU broker | 59 | 79 |
| Signatories of the GCU broker (number of RUs) | 454 | 527 |
| Degree of use of RSRD [% of RUs] | 13 | 15 |

Table 9: Degree of usage of RSRD by RUs

11.3 Implementation of RSRD function in GCU broker by Keepers

All GCU Keepers (including RUs which are Keepers) have the obligation to provide RSRD data via the GCU broker.

KPI Definition

This KPI shows the degree of wagons registered in the GCU broker for which RSRD data are available.

$$\frac{\text{number of wagons linked to RSRD}}{\text{number of wagons in the GCU broker}} \times 100 \leq 100 \%$$

The number of wagons connected to RSRD in the GCU broker by the end of 2022 is 343.118. The degree of wagons linked to RSRD in the GCU broker calculates to 62 %.

| Year | 2022 | 2023 |
|--|-----------|-----------|
| Number of wagons connected to RSRD | 331.876 | 343.118 |
| Number of wagons registered in the GCU broker | 553.127 | 553.416 |
| Degree of wagons linked to RSRD [% of wagons] | 60 | 62 |

Table 10: Degree of wagons linked to RSRD

12 CONCLUSIONS and RECOMMENDATIONS

Even after several meetings and discussions for this second edition of the KPI reporting, the collection of the KPI data still was a challenge. The key problem remains the same: 1st to have a sound definition for a KPI equivalent to the TSI TAF TAP functions, 2nd to define the exact data the IT-tool shall deliver so it is matching the defined KPI's, 3rd to receive the data in due time.

After all, and with the thankful support from staff members of RNE, Raildata and UIP this second KPI report could be finished.

For future reports more KPI will be added, and more IT-providers will have to deliver data. For this, the data delivery must be well planned and agreed amongst all partners involved. Maybe an option could be to link the KPI data delivery with the ERA TAF TAP certification process. We recommend ERA to evaluate the possibility to sign such agreements with the TAF and TAP certified IT-providers or applicants.

For the next few years, we do not see that the KPI reporting can fully replace the old DI reporting based on company feedback with the questionnaire.

However, further development of the reporting heavily depends on the new Telematic Regulation which will likely come into force in 2025. Further steps than will be discussed with all relevant parties.

ANNEX: TTT COMPLIANT COMMON SECTOR TOOLS PROVIDING DATA FOR KPIS

Central Reference Data (CRD) - <https://rne.eu/it/rne-applications/ccs/crd/>

The CRD (formerly known as Central Repository Domain) is a centralised database provided by RailNetEurope (RNE). It stores Location Codes and Company Codes required by European regulation and makes them available to users.

Train Information System (TIS) - <https://rne.eu/it/rne-applications/tis/what-is-tis/>

The Train Information System (TIS) is a web-based application that supports international train management by delivering real-time train data concerning international (partly national) passenger and freight trains. The relevant data is obtained directly from the Infrastructure Managers' systems.

OpenRailFreightEdiUserSystem (ORFEUS) - <https://www.raildata.coop/services/orfeus>

ORFEUS stands for Open Railway Freight EDI User System. It is an information system developed and operated by RailData. It ensures the exchange of railway CIM consignment notes and CUV wagon notes data between the co-operating railway undertakings (RU) using a Central Data management System (CDS).

InternationalServiceReliability (ISR) - <https://www.raildata.coop/services/isr>

ISR aims for International Service Reliability. It is an information system developed and operated by RailData. It is a common tool of ISR railway undertakings for concentration and exchange information about movements of freight wagons in international traffic through a central platform. It makes possible to track both loaded and empty freight wagons and consignments across significant part of Europe.

GCU (General Contract of Use for wagons) Broker - https://gcubureau.org/gcu_broker/

The GCU Bureau and the Joint Committee strongly believe that efficient exchange of information can boost efficiency. With the GCU Broker, GCU presents a free, versatile, low-threshold communication platform, available for all its signatories. GCU Broker will leverage the company's operational software and automate the data exchanges between railway undertakings and wagon keepers by introducing machine-to machine exchange of information via XML.

Disclaimer

The RU/IM Telematics Joint Sector Group (JSG)

The JSG was set up in October 2012 as a voluntary organisation supported by fourteen European Associations involved in the implementation of the rail technical specifications for interoperability of the Telematic Application for Freight (TAF TSI).

<http://taf-jsg.info/>